


ROXY 7 STAND T2

Certificate model name: ROXY 7 T2

<https://free-point.it/>

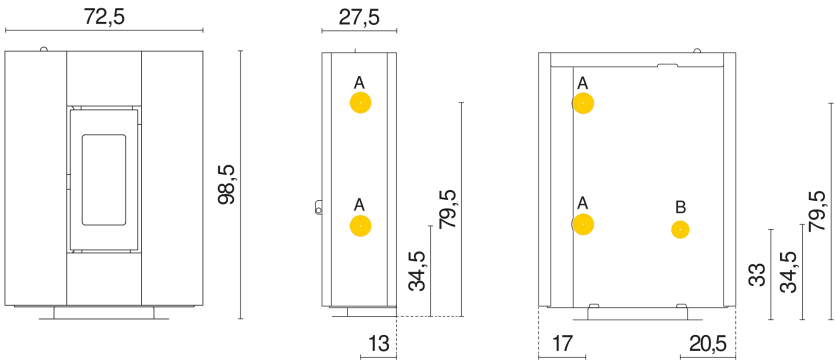

Pellet stoves Air

TECHNICAL DATA

Thermic Power (at min-at max)	kW	2,5 - 6,9
Introduced thermal power (at max)	kW	7,8
Water useful power (at min-at max)	kW	- - -
Seasonal energy efficiency	η_s [%]	85
Useful efficiency (at min-at max)	%	90 - 89
Heatable volume (at min-at max)	m ³	71 - 197
CO ₂ (min-max)	%	6,4 - 12,0
Emissions CO (13% O ₂) (at min-at max)	mg/Nm ³	295 - 125
Emissions OGC (13%O ₂) (at min-at max)	mg/Nm ³	2,0 - 2,0
Emissions NOX (13% O ₂) (at min-at max)	mg/Nm ³	110 - 99
Dust content at 13% O ₂ (at min-at max)	mg/Nm ³	15 - 15
Fuel Pellet	mm	Ø 6 L=3÷40
Hopper capacity	kg	12
Hourly consumption (at min-at max)	kg/h	0,6 - 1,6
Autonomy (at min-at max)	h	20 - 8
Supply and frequency	V-Hz	230-50
Ignition electrical absorption	W	374
Operating electrical absorption (at max)	W	67
Draught for chimney sizing calculation (EN13384-1)	Pa	2
Mass of smoke (at min-at max)	g/sec	3,0 - 4,6
Exhaust fumes temperature (at min-at max)	°C	109 - 177
Distance from material comb. (back/side/under)	mm	40 / 250 / 0
Distance to material comb. (front/top)	mm	600 / 750
Exhaust fumes outlet (A)	Ø mm	80
Combustion air inlet (B)	Ø mm	60
Appliance Type (tightness)	Type	CC50

PLUS



Airtight pellet stove



Cast iron door



Easy Start brazier



Integrated temperature sensor



Connection to the external thermostat



Smart Heat



Silent

AVAILABLE FINISHES

7025133		Steel Red Bordeaux	EAN 8053859022497
7025134		Steel White	EAN 8053859022503
7025135		Steel Anthracite	EAN 8053859022510

CERTIFICATIONS


European standards
BImSchV 2015
Regensburg
München
Stuttgart
Aachen



EN 16510-1:2022 / EN 16510-2-6:2022



STOVE PACKAGE



L (cm)	H (cm)	P (cm)
80	117	60
Volume (m ³)	0,56	
Gross weight (kg)	73	
Net weight (kg)	63	

STORAGE




MAX 2

1

N° (max)
2

TRANSPORT



66 pz