


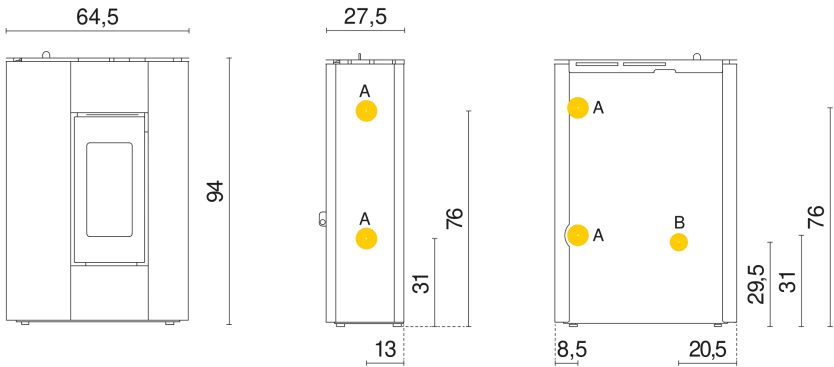

Pellet stoves Air

TECHNICAL DATA

Thermic Power (at min-at max)	kW	2,5 - 5,2
Introduced thermal power (at max)	kW	5,8
Water useful power (at min-at max)	kW	- -
Seasonal energy efficiency	ηs [%]	85
Useful efficiency (at min-at max)	%	91 - 89
Heatable volume (at min-at max)	m³	71 - 148
CO ₂ (min-max)	%	7,1- 10,6
Emissions CO (13% O ₂) (at min-at max)	mg/Nm³	235 - 141
Emissions OGC (13%O ₂) (at min-at max)	mg/Nm³	7,0- 4,0
Emissions NOX (13% O ₂) (at min-at max)	mg/Nm³	121 - 123
Dust content at 13% O ₂ (at min-at max)	mg/Nm³	20 - 17
Fuel Pellet	mm	Ø 6 L=3÷40
Hopper capacity	kg	12
Hourly consumption (at min-at max)	kg/h	0,6 - 1,2
Autonomy (at min-at max)	h	21 - 10
Supply and frequency	V-Hz	230-50
Ignition electrical absorption	W	345
Operating electrical absorption (at max)	W	62
Draught for chimney sizing calculation (EN13384-1)	Pa	2
Mass of smoke (at min-at max)	g/sec	2,7 - 4,1
Exhaust fumes temperature (at min-at max)	°C	138 - 200
Distance from material comb. (back/side/under)	mm	40 / 250 / 0
Distance to material comb. (front/top)	mm	600 / 750
Exhaust fumes outlet (A)	Ø mm	80
Combustion air inlet (B)	Ø mm	60
Appliance Type (tightness)	Type	CC50

PLUS

- Airtight pellet stove
- Cast iron door
- Easy Start brazier
- Integrated temperature sensor
- Connection to the external thermostat
- Smart Heat
- Silent

AVAILABLE FINISHES

7019060		Steel Red Bordeaux	EAN 8053859011507
7019061		Steel White	EAN 8053859011514
7019062		Steel Anthracite	EAN 8053859011521

OPTIONAL

5020001	90° curve kit smoke	EAN 8053859012474
5020017	Kit wi-fi navel stand alone	EAN 8053859013228
5022006	Upper exhaust kit	EAN 8053859017783
5019012	Pellet stove remote control	EAN 8053859011965

CERTIFICATIONS

European standards
Art. 15A B-VG 2015
BlmSchV 2015
Regensburg
München
Stuttgart
Aachen

EN 14785:2006
CE



STOVE PACKAGE

L (cm)	H (cm)	P (cm)
80	117	60
Volume (m³)		0,56
Gross weight (kg)		69
Net weight (kg)		59

STORAGE

N° (max)
2

MAX 2

1

TRANSPORT

66 pz
